

SRE-200 INSTRUCTOR STATION

TOOLS REQUIRED FOR ASSEMBLY


Cordless drill with phillips head Bit & magnetic extension,
3/8" Magnetic socket bit.

BEFORE ASSEMBLING THE WORKBENCH

Read through the assembly instructions to familiarize yourself with the order in which the parts are assembled. We suggest that you clear & vacuum the area where the bench is to be assembled. It is important that the bench is assembled in the same sequence as instructed.

HARDWARE & GMI COMPONENTS

All assembly hardware is provided. Full size photos accompany each step where hardware is needed.

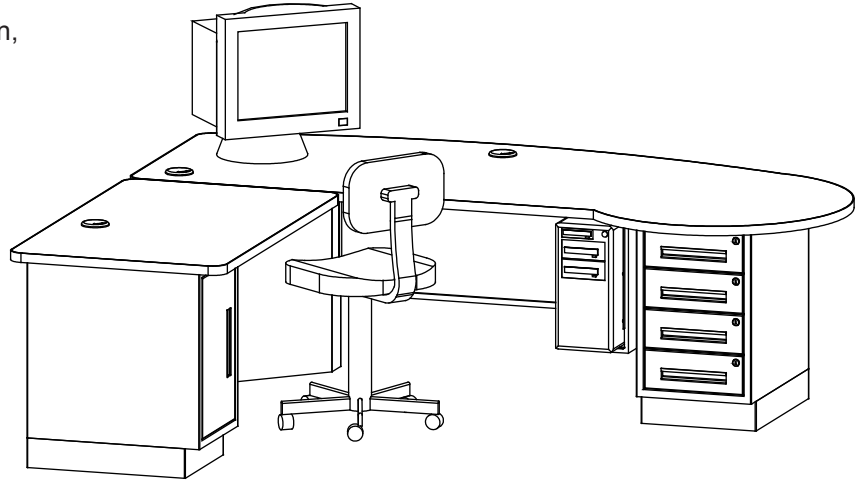


STEP 1

Attach the modesty panel to the base cabinets and corner pedestal. Layout as shown in the top view. Use (2) 1/4-20 x 1/2" Bolts for each end of the modesty panels (8 total). Hand start all bolts or you may strip the threaded insert.



Top View

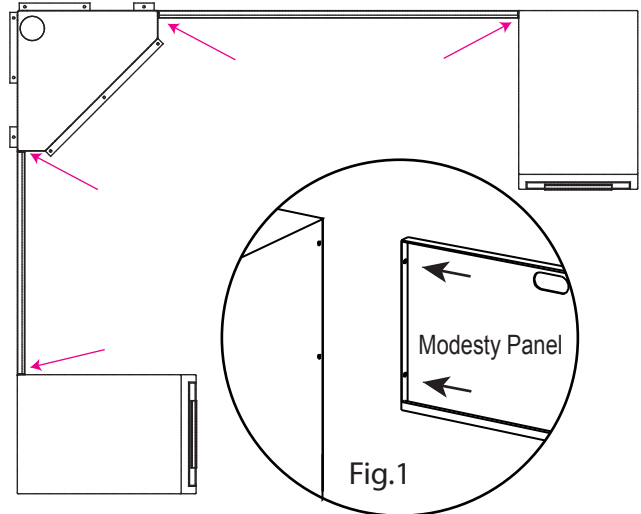


STEP 2

Place the two tops on the assembled base. Adjust until it matches the view to the right. Attach the two tops via the connector plate using (10) #14 x 1" Lag screws.

Attach the top to the bases. Position the top as shown in the image. (You must remove the top drawer(s) from drawer cabinets).

Use #14 x 1" Lag Screws. (4) for each cabinet and (9) for the leg pedestal.

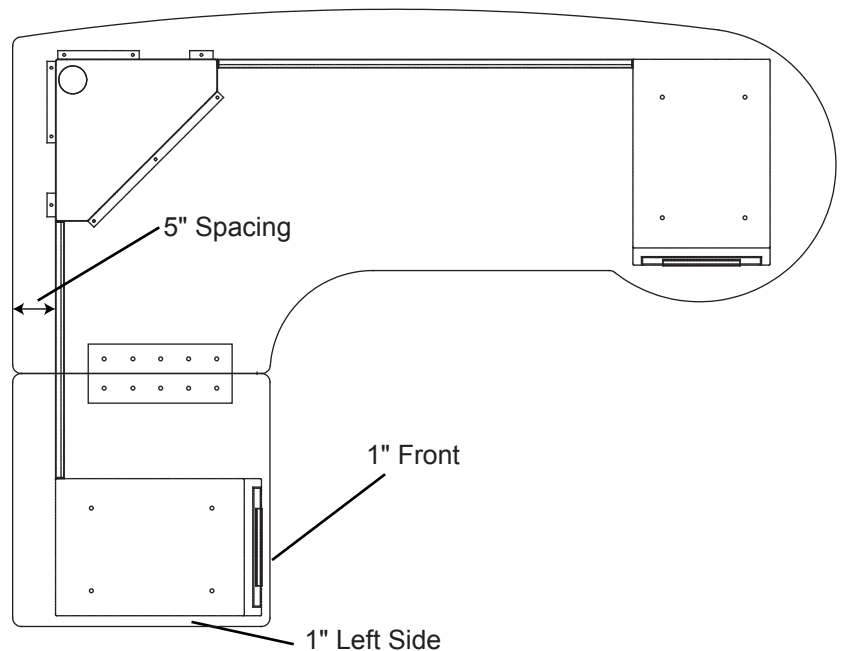


STEP 3

Attach the wire covers to the back side of the modesty panels, under the gromet holes.

Adhesive velcro holds the bottom lip of the cover to the modesty panel.

Use #8 x 5/8" black screws to attach the cover to the top.

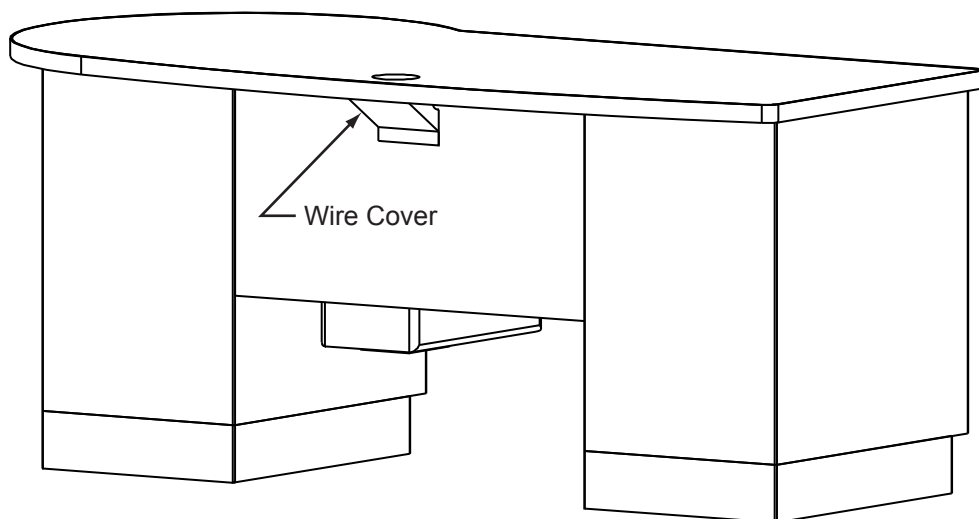

STEP 4

Double sided velcro strips are provided for additional wire management. These are optional. Screw them to the bottom of the work surface as needed. Attach with (1) #8 x 5/8" black screw in the center of each velcro strip.



STEP 5

OPTIONAL CPU RACK

Attach the CPU rack. Instructions & hardware are enclosed in the CPU rack box.

